

**Class I, Div. 1 and 2
Groups C,D
Class II, Div. 1 and 2
Groups F,G
Class III
NEMA 3,3R,7CD,9FG**

U-Line® Portable Receptacle with GFCI Explosionproof, Dust-Ignitionproof

For use on Hazardous or Non-Hazardous Receptacles Rated 20A, 125VAC.

Applications

- Provides required portable ground fault protection for electrically-operated devices. Meets all UL and CSA requirements for ground fault protection in hazardous locations.
- Well suited for use in highly corrosive atmospheres and wet locations.

Features

- Arcing, if any, is confined within the devices interior.
- Rated 20A, 125VAC, 5 MA trip setting.
- Provides open neutral protection to maximize safety for plant personnel.
- High intensity LED pilot light rated at 100,000 hours. Incandescent optional, consult factory.
- Smooth-operating test and reset buttons.
- Heavy duty 3' SO power cord with U-Line 20A NEMA 5-20P plug.
- Lightweight (7-1/2 lbs.) design.
- Convenient carry/hanging handle.
- Plug mates with competitors comparable receptacles. The receptacle also accepts their respective plugs.

Standard Materials


- *Covers and backbox:* cast copper-free aluminum (less than 4/10ths of 1%).
- *Cover bolts, test and reset buttons and shafts:* stainless steel.
- *Hanging cable:* nylon covered galvanized steel.

Standard Finish

- Baked grey epoxy clad finish.

Compliances

- UL Standard 943 and 1203
- NEMA 3, 3R, 7CD, and 9FG
- CSA Standard C22.2

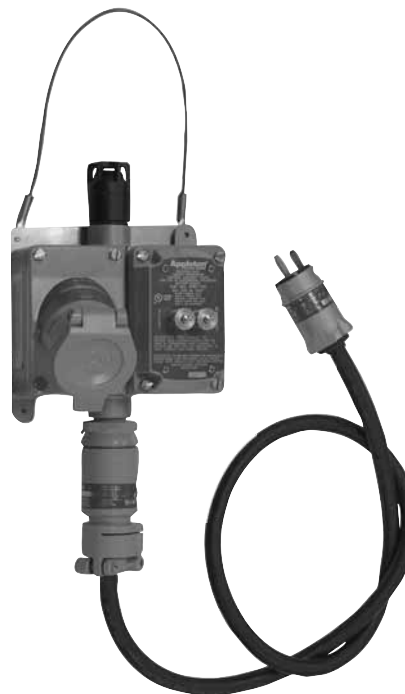

Amperage	Pilot Light	Class I, Division 1 and 2
20	Green LED	U2023PGFID1G3
	Red LED	U2023PGFID1R3

Dimensions

