

## UL Listed Raintight Steel EMT Compression Connectors and Couplings

### Raintight Gland Compression Connector – 7000SR Series

**Use:**  
To ground and secure EMT raceway to boxes and enclosures in wet locations.

- Features:**
- UL Listed Raintight
  - InspectoRidge<sup>®</sup> external visual inspection aid — See below
  - No disassembly required
  - Male hub threads NPS
  - Available with and without insulated throat
  - Concretetight


- Material/Finish:**
- Steel Body & Nut Zinc Electroplated
  - Silicone Rubber Internal Sealing Ring
  - EPDM Rubber KO Sealing Ring

**Third Party Certification:**

- UL Listed: E-14895
- Listed Raintight

**Applicable Third Party Standards:**

- UL Standard: 514B
- NEMA: FB-1
- Federal Spec: W-F-408E



Type 7050SR – Type 7200SR

Trade Size (inches)	Catalog Number	Insulated Throat Catalog Number	Dimensions in Inches			Wt. Lbs. Per 100	Ctn. Qty.	Std. Pkg.
			Body Length	Max Dia.	Thread Length			
1/2	7050SR	7050SRT	1-29/32	1-5/32	7/16	15	25	250
3/4	7075SR	7075SRT	1-31/32	1-3/8	7/16	21	25	250
1	7100SR	7100SRT	2-1/8	1-3/4	15/32	32	20	200
1-1/4	7125SR	7125SRT	2-11/16	2-5/32	17/32	38	5	25
1-1/2	7150SR	7150SRT	2-31/32	2-7/16	9/16	48	5	25
2	7200SR	7200SRT	3-11/32	2-29/32	23/32	62	2	10

### Raintight Gland Compression Coupling Type – 6000SR Series

**Use:**  
To ground and secure EMT raceway sections together in wet locations.

- Features:**
- UL Listed Raintight
  - InspectoRidge<sup>®</sup> external visual inspection aid — See below
  - No disassembly required
  - Concretetight


- Material/Finish:**
- Steel Body & Nut Zinc Electroplated
  - Silicone Rubber Internal Sealing Rings

**Third Party Certification:**

- UL Listed: E-14895
- Listed Raintight


**Applicable Third Party Standards:**

- UL Standard: 514B
- NEMA: FB-1
- Federal Spec: W-F-408E



Type 6050SR – Type 6200SR

Trade Size (Inches)	Catalog Number	Dimension in Inches		Wt. Lbs. Per 100	Ctn. Qty.	Std. Pkg.
		Body Length	Max. Dia.			
1/2	6050SR	2-25/32	1-1/8	19	25	250
3/4	6075SR	3	1-11/32	25	20	200
1	6100SR	3-11/32	1-5/8	39	20	100
1-1/4	6125SR	3-11/16	2	47	5	25
1-1/2	6150SR	3-23/32	2-9/32	56	5	25
2	6200SR	4-1/8	2-3/4	73	2	10

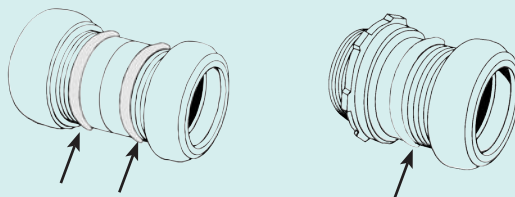

**InspectoRidge™**

Provides external visual inspection aid on outside surface, to assure raintight fittings are installed, without disassembly of conduit run.